

System: Laufschiene mit Festglashalterung, Wand- oder Deckenmontage, mit Laufwerk für verdeckte Montage, für 1 Glastüre bis 36 kg. Design Alu-Glasfixierungsprofil 24/12 mm – Inslide

System: Running track with fixed glass support profile, wall or ceiling mounted, with running gear for concealed fixing, for 1 glass door up to 36 kg.

Design aluminium glass fixing profile 24/12 mm – Inslide

Sistema: Binario di scorrimento con sostegno per cristallo fisso, montaggio a parete o a soffitto, con carrello per montaggio a scomparsa, per 1 anta in cristallo fino a 36 kg.

Design Profilo di fissaggio cristallo alluminio 24/12 mm – Inslide



Klebstoff-Empfehlungen für Glas:

Recommended adhesive for glass:


Adesivi consigliati per cristallo:

– CERESIT 3B Silikon 67

– 3M Scotch Weld DP 105

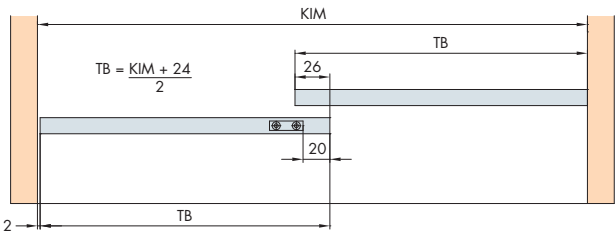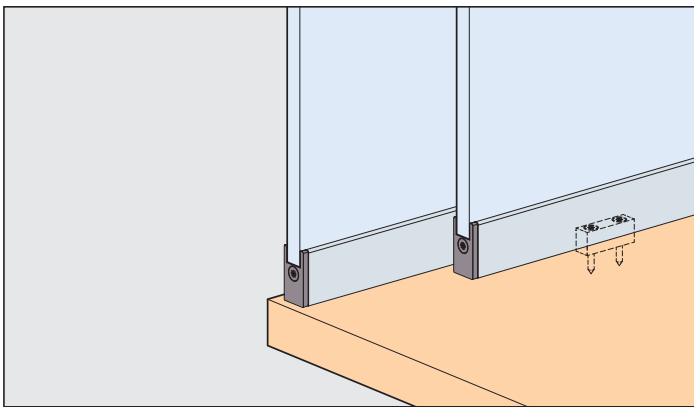

Einbaubeispiele/Mounting examples/Esempi di montaggio

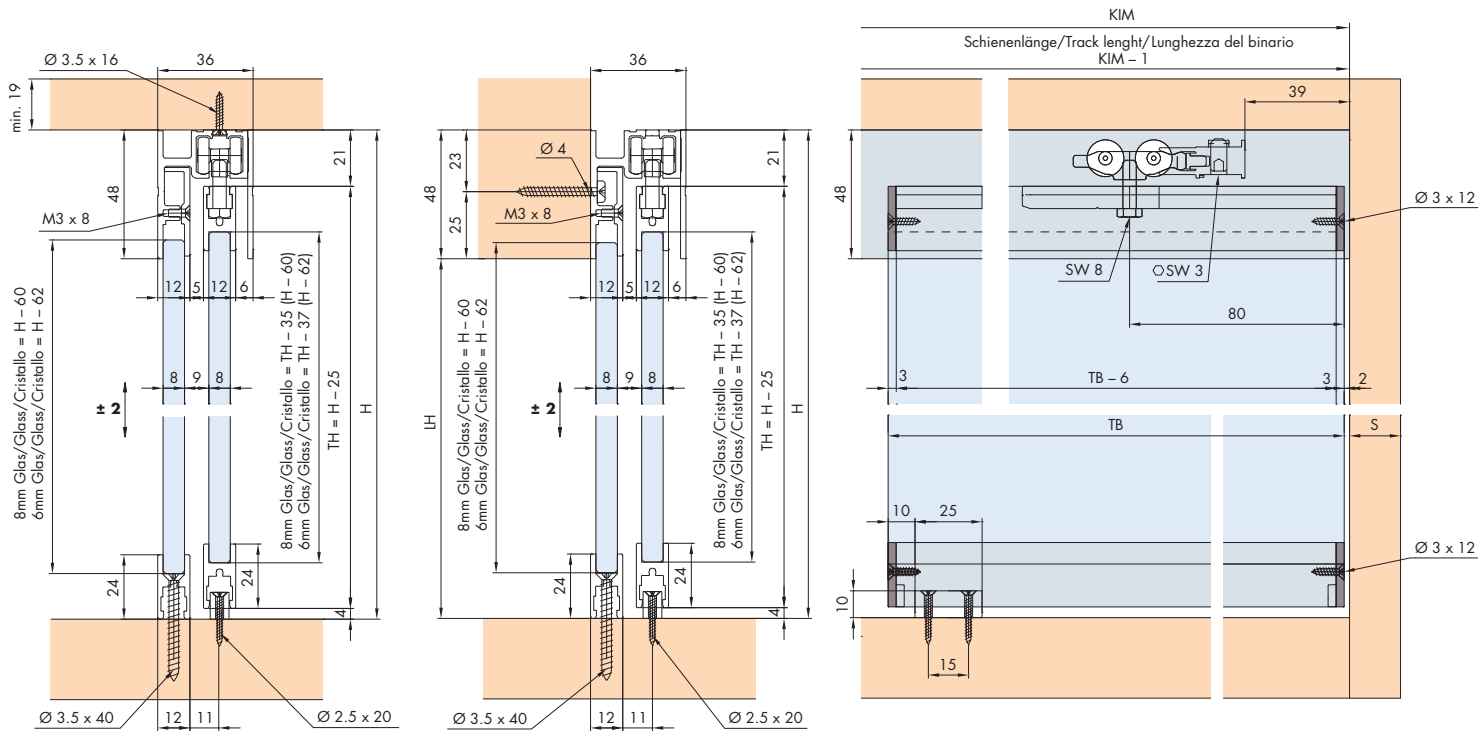


Glasempfehlung / Glass recommendation / Suggestimento per il cristallo 69

* Zentrierhilfe für 6 mm Glas
 Centring aid for 6 mm glass
 Ausilio per la centratura con cristallo da 6 mm



Türgewichte
Door weights
Pesi ante **69**



Garnituren / Sets / Guarniture



Zubehör / Accessories / Accessori

Einfachlaufschiene Alu, gelocht, zum Aufschrauben, mit integrierter Blende

Single running track aluminium, pre-drilled, surface mounted, with integrated panel


Binario di scorrimento semplice in alluminio, forato, da avvitare esternamente, con frontale integrato

Gr./Size

Art. No.

2500 mm

053.3338.250

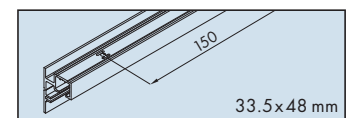


Festglashalteprofil Alu eloxiert, gelocht

Fixed glass support profile aluminium anodized, pre-drilled

Profilo di supporto cristallo fisso in alluminio, anodizzato, forato

2500 mm

053.3071.250

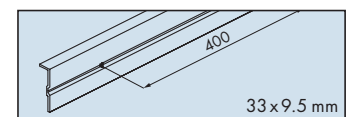


Blende Alu, eloxiert**

Panel aluminium, anodized**

Frontale in alluminio, anodizzato**

2500 mm

053.3075.250

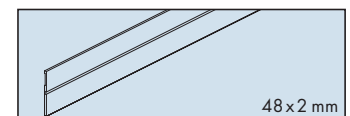

Glasfixierungsprofil Alu, eloxiert

Glass fixing profile aluminium, anodized

Profilo per il fissaggio del cristallo, alluminio, anodizzato

2500 mm

053.3072.250

3500 mm

053.3072.350

6000 mm

053.3072.600




Taptite Schrauben M3 x 8, zu Festglashalteprofil

Taptite screws, M3 x 8, for fixed glass support profile

Viti Taptite M3 x 8, per profilo di supporto cristallo fisso

50 x

098.0007.101

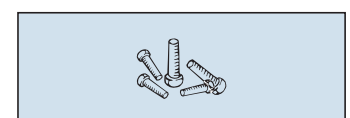

** **Doppelklebeband verwenden** / use double-sided adhesive tape / utilizzare nastro biadesivo
z.B./e.g./p. es. 3M Scotchtype 4664/4905-f/4936/4930

Sonderzubehör/Special accessories/Accessori speciali: ☞ 64-66